

Gasmate

THE OUTDOORS MADE EASY



Gasmate Classic Patio Heater (PH7057) shown

extend the season of outdoor
entertaining

Gas Heater Series




The introduction of Gasmate Gas Patio Heaters into the Australian market in 1999 was the catalyst in the creation of what we now term, 'Al Fresco' living. When developing the range, Gasmate is always focused on engineering quality and energy efficient outdoor heating solutions. Gasmate Gas Heaters extend the season of outdoor alfresco entertaining into the cooler months.


Heating coverage

These diagrams show the heating coverage of our patio, area and column heater range. Please note diagrams depicts heating on right hand side only, however heating is multi directional (circular) – therefore area to left / right / front / back and in-between receives same amount of heat.


Patio Heater Heating Coverage

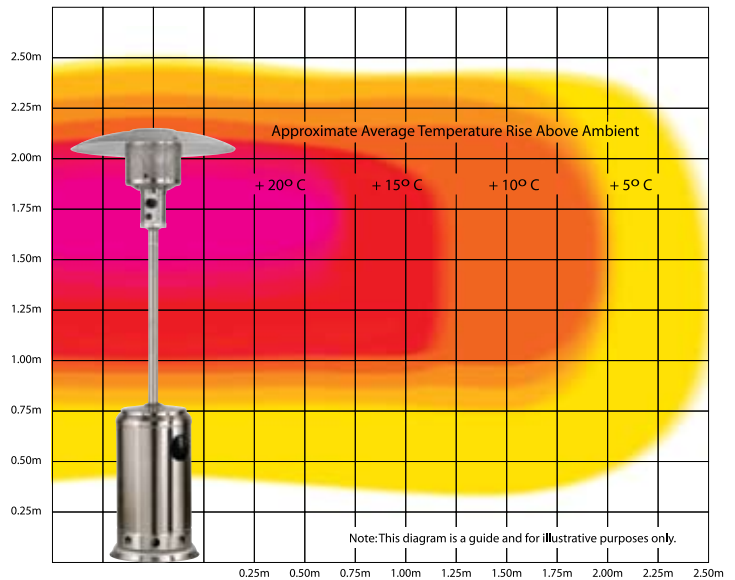

Area Heater Heating Coverage

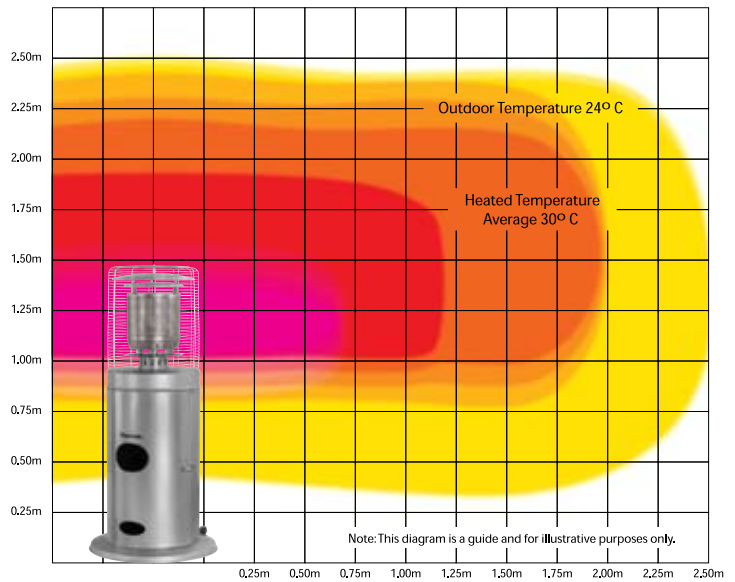

Column Heater Heating Coverage

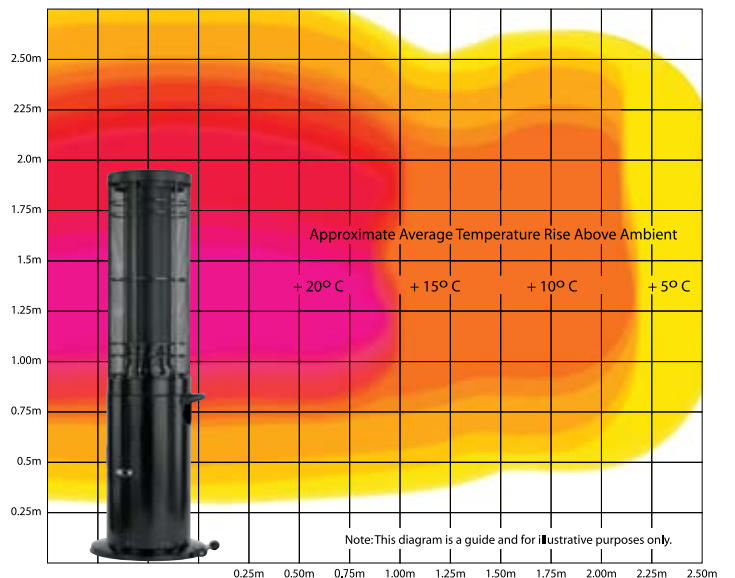

Solaris Patio Heater Series

- Maximum output 40MJ/h
- Electronic direct ignition
- Adjustable heat output
- Long running times – Operates for approximately 9 hours on a properly filled 9Kg propane cylinder
- Includes a safety 'tip-over' switch that halts supply of gas to the unit should it be accidentally knocked over
- Flame safeguard system for enhanced safety
- Includes wheels
- Complete with hose and regulator
- For outdoor use only
- AGA Certified



MODEL No. PH6056

To complement your outdoor wicker furniture

MODEL No. PH6055

MODEL No. PH6059

MODEL No. PH6058

SPECIFICATIONS	PH6056	PH6055	PH6059	PH6058
Finish	Powder coated & wicker	Powder coated - Black	Stainless steel	Auto clear coat
Height	2130mm	2130mm	2130mm	2130mm
Width / Depth	813mm sectional reflector	813mm sectional reflector	813mm sectional reflector	813mm sectional reflector
Maximum output	40MJ/h	40MJ/h	40MJ/h	40MJ/h
Consumption (approx.)	9hrs per 9Kg propane	9hrs per 9Kg propane	9hrs per 9Kg propane	9hrs per 9Kg propane

Classic Patio Heater

Maximum output 40MJ/h
Adjustable heat output

Long running times – Operates for approximately 9 hours on a properly filled 9Kg propane cylinder

Includes a safety 'tip-over' switch that halts supply of gas to the unit should it be accidentally knocked over

Flame safeguard system for enhanced safety

Includes wheels

Rotary direct ignition

Complete with hose and regulator

For outdoor use only

AGA Certified



MODEL No. PH7057

SPECIFICATIONS	PH7057
Finish	Graphite (electroplated)
Height	2130mm
Width / Depth	813mm sectional reflector
Maximum output	40MJ/h
Consumption (approx.)	9hrs per 9Kg propane

Column Heater

Stylish design

Maximum output 35MJ/h

Adjustable heat output

Long running times – Operates for approximately 10 hours on a properly filled 9Kg propane cylinder

Includes a safety 'tip-over' switch that halts supply of gas to the unit should it be accidentally knocked over

Flame safeguard system for enhanced safety

Door opening enables easy access to cylinder

Wheels to make moving column heater easy

Complete with hose and regulator

For outdoor use only

AGA Certified



MODEL No. CH205MB

SPECIFICATIONS	CH205MB
Finish	Black powder coated
Height	1780mm
Width / Depth	540mm
Maximum output	35MJ/h
Consumption (approx.)	10hrs per 9Kg propane

Nova

Patio Heater Series

- Maximum output 40MJ/h
- Piezo direct ignition
- Adjustable heat output
- Long running times – Operates for approximately 9 hours on a properly filled 9Kg propane cylinder
- Includes a safety 'tip-over' switch that halts supply of gas to the unit should it be accidentally knocked over
- Flame safeguard system for enhanced safety
- Includes wheels
- Complete with hose and regulator
- For outdoor use only
- AGA Certified



MODEL No. PH2063



MODEL No. PH2069



MODEL No. PH2060

SPECIFICATIONS	PH2063	PH2069	PH2060
Finish	Charcoal Hammertone	Stainless steel	Silver powder coated
Height	2130mm	2130mm	2130mm
Width / Depth	813mm sectional reflector	813mm sectional reflector	813mm sectional reflector
Maximum output	40MJ/h	40MJ/h	40MJ/h
Consumption (approx.)	9hrs per 9Kg propane	9hrs per 9Kg propane	9hrs per 9Kg propane

Meridian Area Heater Series

A practical alternative to a Patio Heater where ceiling clearance may be an issue
 Maximum output 40MJ/h
 Rotary direct ignition
 Adjustable heat output
 Long running times – Operates for approximately 9 hours on a properly filled 9Kg propane cylinder

Includes a safety 'tip-over' switch that halts supply of gas to the unit should it be accidentally knocked over
 Flame safeguard system for enhanced safety
 Includes wheels
 Complete with hose and regulator
 For outdoor use only
 AGA Certified



MODEL No. AH2063



MODEL No. AH2069



MODEL No. AH2068

SPECIFICATIONS	AH2063	AH2069	AH2068
Finish	Charcoal hammertone	Stainless steel	Auto clear coat
Height	1350mm	1350mm	1350mm
Width / Depth	540mm	540mm	540mm
Maximum output	40MJ/h	40MJ/h	40MJ/h
Consumption (approx.)	9hrs per 9Kg propane	9hrs per 9Kg propane	9hrs per 9Kg propane

AVAILABLE FROM

Due to continual product development, the product you purchase may differ slightly from the one shown here. Gasmate® is a registered trademark of Sitro Group Australia Pty. Ltd. www.gasmate.com.au and AberGas Ltd. Hamilton, N.Z. www.gasmate.co.nz